




4-Pole Contactors (10 - 15hp @ 575V)
LS5K, LS7K

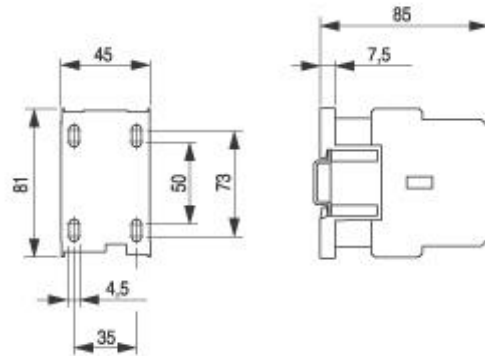

Contactor Selection and Data

		HP @ 575V (kW @ 380/415V, 50Hz)			
		10HP (5.5kW)	15HP (7kW)	-	
AC Contactors	Full Voltage Non-Reversing	LS5K-400-*	LS7K-400-*	-	
	Reversing	LS5K-R00-*	LS7K-R00-*	-	
Auxiliary Contacts	Maximum Aux Contacts	8	8	-	
	Maximum Contact Blocks	6	6	-	
Auxiliary Contacts Amperage (A600, P600)		10A	10A	-	
Continuous Amperage Rating (UL/CSA)		25A	32A	-	
AC-1 (Resistive) Amperage		25A	32A	-	
Full Load Amperage (AC-3)		13.8A	17.5A	-	
Horsepower Ratings	Single Phase	115V	0.75	1	-
		230V	2	3	-
	Three Phase	200V	3	5	-
		230V	3	5	-
		460V	7.5	10	-
	575V	10	15	-	

* - Coil Selection			Coil Data			
AC	DC	Suffix	-	AC	DC	
24V	-	G	Inrush Burdon	45VA	5.5W	
120V	-	A	Holding Burdon	6VA	5.5W	
208/230V	-	C	Pick Up Voltage (+/-)	10+ / -15 %	10+ / -20 %	
347V	-	347V	Drop Out Voltage (-)	(-) 45-60%	(-)60-80%	
480V	-	E	Maximum Operations Per Hour			
600V	-	F	No Load	9000	3600	
-	12V	MSW	Rated Load (AC-1, AC-3)	1200	1200	
-	24V	NSW	Full Motor Load (AC-4)	360	360	
-	48V	OSW	Dimensions	Height (Inch)	Width (Inch)	Depth (Inch)
-	110V	PSW		3.19"	1.77"	3.35" (4.5" DC)