




Overload Relays - Class 10
B05



Overload Selection and Data

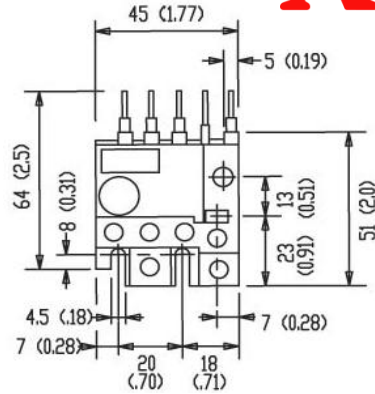

Class 10 Overload Relays	Direct Mount	Manual/Auto Reset	B05-*	
	Separate Mount	Manual/Auto Reset	B05-AK-*	
For use with AEG Contactors:		3 - 7.5hp @ 575V (LS02K, LS05, LS06K)		
Type:		3 Pole, Differential (phase unbalanced protection)		
Ambient Temperature:		-25 to +60 degree Celsius		
Auxiliary Contacts:		1 Normally Open (B600, Q600)		
Net Weight:		4 oz / 0.12Kg		
Dimensions:		2.5" H x 1.77" W x 2.76" D		
Part Number:	Current Rating: (Adjustable)	Maximum Fuse Rating HRC11	Maximum Fuse Rating K5	
B05-A	0.11 - 0.17A	-	-	
B05-B	0.17 - 0.26A	-	-	
B05-C	0.26 - 0.43A	2	1	
B05-D	0.43 - 0.65A	4	1	
B05-E	0.65 - 1.0A	6	3	
B05-F	0.85 - 1.3A	6	3	
B05-G	1.1 - 1.6A	10	6	
B05-GN	1.35 - 2.0A	10	6	
B05-H	1.7 - 2.4A	16	6	
B05-IN	2.2 - 3.2A	16	10	
B05-JN	3.0 - 4.7A	16	15	
B05-K	4.0 - 6.3A	20	20	
B05-L	5.5 - 8.0A	25	30	
B05-M	7.5 - 10.5A	35	40	
B05-NN	10 - 14A	50	50	