

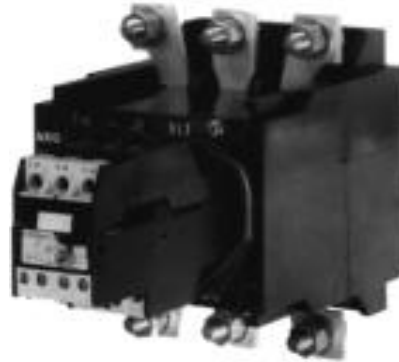




Overload Relays - Class 10
B160K

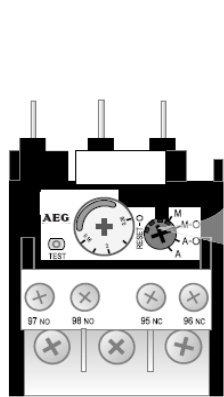

Overload Selection and Data

Class 10 Overload Relays	Direct Mount	Manual/Auto Reset	B160K-*	
	Separate Mount	Manual/Auto Reset	B160K-*	
For use with AEG Contactors:		150 - 300hp @ 575V (LS110K, LS132K, LS160K)		
Type:		3 Pole, Differential (phase unbalanced protection)		
Ambient Temperature:		-25 to +60 degree Celsius		
Auxiliary Contacts:		Two Independent double breaker contacts (B600, Q600)		
Net Weight:		5lb 5oz / 2.42Kg		
Dimensions:		6.92" H (175.9mm) x 5.08" W (129.2mm) x 9.12" D (231.6mm)		
Part Number:		Current Rating: (Adjustable)	Maximum Fuse Rating (Amperes)	Max Circuit Breaker Rating (Amperes)
B160K-190A		120 - 190A	600	500
B160K-280A		175 - 280A	800	700
B160K-310A		200 - 310A	900	800