




Overload Relays - Class 10
B55K

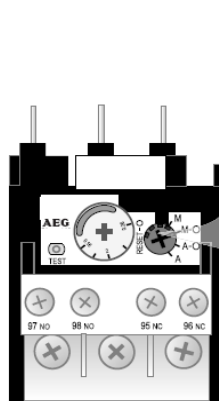

Overload Selection and Data

Class 10 Overload Relays	Direct Mount	Manual/Auto Reset	B55K-*	
	Separate Mount	Manual/Auto Reset	B55K-AD-*	
For use with AEG Contactors:		40 - 75hp @ 575V (LS22K, LS30K, LS37K, LS45K, LS55K)		
Type:		3 Pole, Differential (phase unbalanced protection)		
Ambient Temperature:		-25 to +60 degree Celsius		
Auxiliary Contacts:		Two Independent double breaker contacts (B600, Q600)		
Net Weight:		13 oz / 0.37Kg		
Dimensions:		3.14" H (79.7mm) x 2.44" W (62mm) x 4.32" D (109.7mm)		
Part Number:		Current Rating: (Adjustable)	Maximum Fuse Rating (Amperes)	Max Circuit Breaker Rating (Amperes)
B55K-15A		11.5 - 15A	35	25
B55K-19A		14.5 - 19A	50	45
B55K-25A		18.5 - 25A	70	60
B55K-32A		24 - 32A	90	80
B55K-43A		30 - 43A	100	100
B55K-55A		42 - 55A	150	125
B55K-65A		54 - 65A	175	150
B55K-82A		64 - 82A	225	200
B55K-97A		78 - 97A	225	225
B55K-110A		90 - 110A	225	250