




Overload Relays - Class 10
B90K

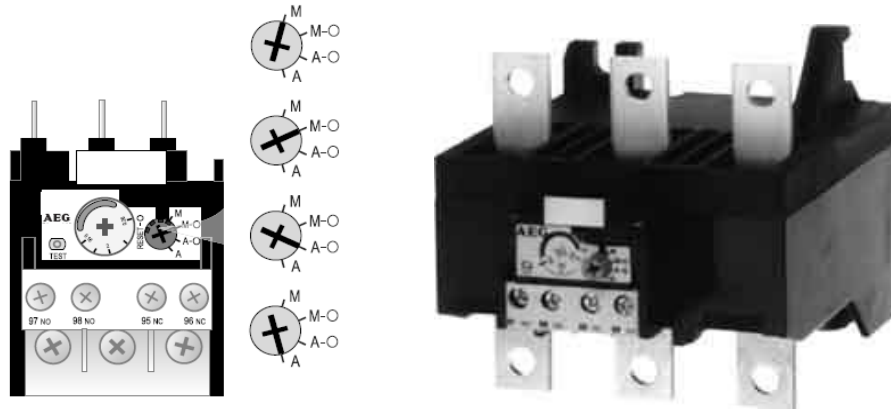

Overload Selection and Data

Class 10 Overload Relays	Direct Mount	Manual/Auto Reset	B90K-*	
	Separate Mount	Manual/Auto Reset	B90K-*	
For use with AEG Contactors:		125 - 150hp @ 575V (LS75K, LS90K)		
Type:		3 Pole, Differential (phase unbalanced protection)		
Ambient Temperature:		-25 to +60 degree Celsius		
Auxiliary Contacts:		Two Independent double breaker contacts (B600, Q600)		
Net Weight:		2lb / 0.91Kg		
Dimensions:		4.14" H (105mm) x 4.25" W (107.8mm) x 5.39" D (136.6mm)		
Part Number:		Current Rating: (Adjustable)	Maximum Fuse Rating (Amperes)	Max Circuit Breaker Rating (Amperes)
B90K-80A		55 - 80A	225	200
B90K-90A		63 - 90A	250	225
B90K-120A		90 - 120A	350	300
B90K-140A		110 - 140A	400	350
B90K-190A		140 - 190A	450	500