




3-Pole Contactors (15hp @ 480V)
LS11K

AEG

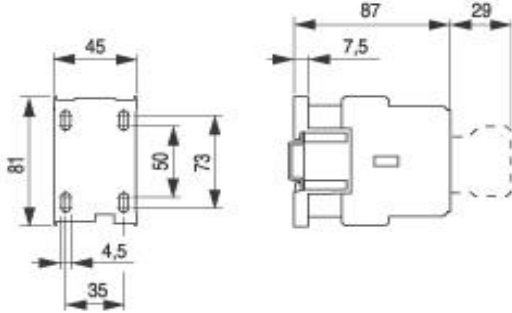

Contactor Selection and Data



		HP @ 575V (kW @ 380/415V, 50Hz)				
		15HP (11kW)				
AC Contactors	Full Voltage Non-Reversing	LS11K-300-*	-	-		
	Reversing	RLS11K-*	-	-		
Auxiliary Contacts	Maximum Aux Contacts	8	-	-		
	Maximum Contact Blocks	6	-	-		
Auxiliary Contacts Amperage (A600, P600)		10A	-	-		
Continuous Amperage Rating (UL/CSA)		32A	-	-		
AC-1 (Resistive) Amperage		45A	-	-		
Full Load Amperage (AC-3)		22A	-	-		
Horsepower Ratings	Single Phase	115V	1.5	-	-	
		230V	3	-	-	
	Three Phase	200V	5	-	-	
		230V	7.5	-	-	
		460V	15	-	-	
		575V	15	-	-	
* - Coil Selection		Coil Data				
AC	DC	Suffix	-	AC	DC	
24V	-	G	Inrush Burden	45VA	5.5W	
120V	-	A	Holding Burden	6VA	5.5W	
208/230V	-	C	Pick Up Voltage (+/-)	+10 / -15 %	+10 / -20 %	
347V	-	347V	Drop Out Voltage (-)	(-) 45-60%	(-) 60-80%	
480V	-	E	Maximum Operations Per Hour			
600V	-	F	No Load	9000	3600	
-	12V	MSW	Rated Load (AC-1, AC-3)	1200	1200	
-	24V	NSW	Full Motor Load (AC-4)	360	360	
-	48V	OSW	Dimensions	Height (Inch)	Width (Inch)	Depth (Inch)
-	110V	PSW		3.19"	1.77"	3.43" / 4.6"