




3-Pole Contactors (400 - 500hp @ 575V)
LS220K, LS280K

AEG

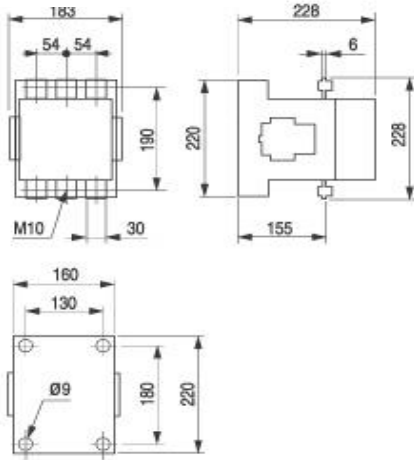

Contactor Selection and Data



		HP @ 575V (kW @ 380/415V, 50Hz)			
		400HP(220kW)	500HP(280kW)		
AC Contactors	Full Voltage Non-Reversing	LS220K-322-*	LS280K-322-*	-	
	Reversing	RLS220K-*	RLS280K-*	-	
Auxiliary Contacts	Maximum Aux Contacts	8	8	-	
	Maximum Contact Blocks	4	4	-	
Auxiliary Contacts Amperage (A600, P600)		10A	10A	-	
Continuous Amperage Rating (UL/CSA)		500A	600A	-	
AC-1 (Resistive) Amperage		600A	700A	-	
Full Load Amperage (AC-3)		398A	480A	-	
Horsepower Ratings	Single Phase	115V	-	-	
		230V	-	-	
	Three Phase	200V	125	150	-
		230V	150	200	-
		460V	300	400	-
		575V	400	500	-
* - Coil Selection		Coil Data			
AC	DC	Suffix	-	AC	
24V		GN	Inrush Burden	750VA	
120V		AP	Holding Burden	25VA	
230V		CR	Pick Up Voltage (+/-)	+10 / -20 %	
480V		EX	Drop Out Voltage (-)	(-) 45-60%	
		Maximum Operations Per Hour			
		No Load	1200		
		Rated Load (AC-1, AC-3)	600		
		Full Motor Load (AC-4)	150		
Dimensions	Height (Inch)	Width (Inch)	Depth (Inch)		
	8.98"	5.0"	9.05"		