




3-Pole Contactors (40 - 60hp @ 575V)
LS22K, LS30K, LS37K



Contactor Selection and Data

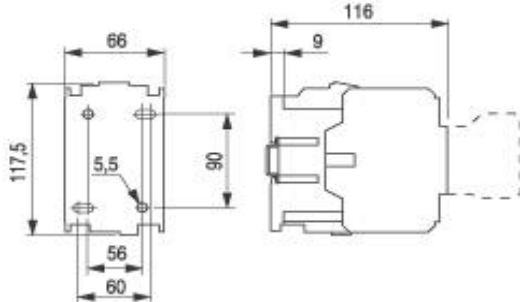

		HP @ 575V (kW @ 380/415V, 50Hz)				
		40HP (22kW)	50HP (30kW)	60HP (37kW)		
AC Contactors	Full Voltage Non-Reversing	LS22K-300-*	LS30K-300-*	LS37K-300-*		
	Reversing	RLS22K-*	RLS30K-*	RLS37K-*		
Auxiliary Contacts	Maximum Aux Contacts	10	10	10		
	Maximum Contact Blocks	8	8	8		
Auxiliary Contacts Amperage (A600, P600)		10A	10A	10A		
Continuous Amperage Rating (UL/CSA)		80A	100A	102A		
AC-1 (Resistive) Amperage		90A	100A	110A		
Full Load Amperage (AC-3)		48A	62A	68A		
Horsepower Ratings	Single Phase	115V	3	5	5	
		230V	7.5	10	15	
	Three Phase	200V	15	20	20	
		230V	15	20	25	
		460V	30	40	50	
		575V	40	50	60	
* - Coil Selection			Coil Data			
AC	DC	Suffix	-	AC	DC	
24V	-	G	Inrush Burden	191VA	125W	
120V	-	A	Holding Burden	17VA	2.5W	
208/230V	-	C	Pick Up Voltage (+/-)	+10 / -15 %	+10 / -20 %	
347V	-	347V	Drop Out Voltage (-)	(-) 45-60%	(-) 60-80%	
480V	-	E	Maximum Operations Per Hour			
600V	-	F	No Load	9000	2500	
-	12V	MSW	Rated Load (AC-1, AC-3)	1200	1200	
-	24V	NSW	Full Motor Load (AC-4)	200	200	
-	48V	OSW	Dimensions	Height (Inch)	Width (Inch)	Depth (Inch)
-	110V	PSW		4.63"	2.6"	4.57" / 5.67"