




3-Pole Contactors (7.5 - 15hp @ 575V)
LS4K, LS5K, LS7K



Contactor Selection and Data

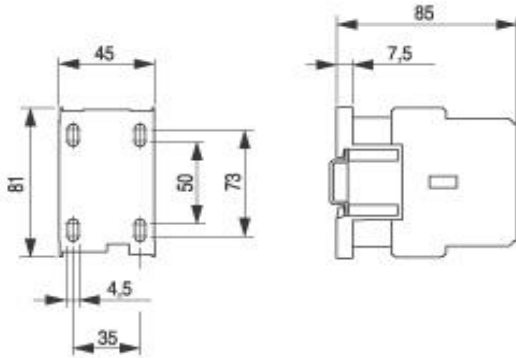

		HP @ 575V (kW @ 380/415V, 50Hz)				
		7.5HP (4kW)	10HP (5.5kW)	15HP (7.5kW)		
AC Contactors	Full Voltage Non-Reversing	LS4K-310-*	LS5K-310-*	LS7K-310-*		
	Reversing	RLS4K-*	RLS5K-*	RLS7K-*		
Auxiliary Contacts	Maximum Aux Contacts	9 (1 Built In)	9 (1 Built In)	9 (1 Built In)		
	Maximum Contact Blocks	6	6	6		
Auxiliary Contacts Amperage (A600, P600)		10A	10A	10A		
Continuous Amperage Rating (UL/CSA)		25A	25A	30A		
AC-1 (Resistive) Amperage		25A	25A	32A		
Full Load Amperage (AC-3)		10A	13.8A	17.5A		
Horsepower Ratings	Single Phase	115V	0.75	0.75	1	
		230V	1.5	2	3	
	Three Phase	200V	3	3	5	
		230V	3	3	5	
		460V	5	7.5	10	
		575V	7.5	10	15	
* - Coil Selection			Coil Data			
AC	DC	Suffix	-	AC	DC	
24V	-	G	Inrush Burden	45VA	5.5W	
120V	-	A	Holding Burden	6VA	5.5W	
208/230V	-	C	Pick Up Voltage (+/-)	+10 / -15 %	+10 / -20 %	
347V	-	347V	Drop Out Voltage (-)	(-) 45-60%	(-) 60-80%	
480V	-	E	Maximum Operations Per Hour			
600V	-	F	No Load	9000	3600	
-	12V	MSW	Rated Load (AC-1, AC-3)	1200	1200	
-	24V	NSW	Full Motor Load (AC-4)	360	360	
-	48V	OSW	Dimensions	Height (Inch)	Width (Inch)	Depth (Inch)
-	110V	PSW		3.19"	1.77"	3.35" / 4.53"